

## RAILWAY REINFORCED CONCRETE INFRASTRUCTURE LIFE MANAGEMENT AND SUSTAINABILITY INDEX

SEYED MOHAMMAD SADEGH LAJEVARDI\*, PAULO B. LOURENÇO,  
HÉLDER S. SOUSA, JOSÉ C. MATOS

*University of Minho, ISISE, Department of Civil Engineering, Campus of Azurém, 4800-058, Guimarães, Portugal*

\* corresponding author: [sadegh.lajevardi@gmail.com](mailto:sadegh.lajevardi@gmail.com)

### ABSTRACT.

Infrastructure healthy enhancement for saving resources in operation procedures is one of the most important objectives for owners on their decision support system based on cost management. In this manner, finding the intervention action priority, as well as the inspection method and maintenance system for each component, with regard to a limited resources amount is investigated in this paper. Defects on infrastructure components create data and these data are undoubtedly useful to increase the knowledge in decision making in practice. In that sense, risk analysis and value of information can be applied using decision trees together with Bayesian networks. For data filtering and noise reduction, a principal component analysis may also be applied to manage a database and prepare useful input variables for the decision tree system. This paper presented an approach for the maintenance managers to prepare their infrastructure available with a sustainable index with minimum cost. This index would be a tool for decision-makers with regard to the cost management and sustainability aspects.

KEYWORDS: Life management, maintenance planing, sustainability index.

## 1. INTRODUCTION

Most of the transportation modes are made through railway networks and road infrastructures. Passengers' expectation is directly affected by the quality of structures and equipment during the operation. Saving quality level requires planning and predicting resource consumption based on the status of their materials in their degradation model and maintenance approach. The maintenance approach would be renewed or retrofitted during the operation. Quality will explain by performance indicator which has been affected by several attitudes, especially peripheral climate such as strong corrosion processes in the coastal area or freezes and thaw in deserts that result from temperature degree changes or moisture percentage changes in terms of sustainability and environments [1]. Therefore, there is a wide range of alternatives and conflicting criteria are involved as the root of failure on infrastructure. Therefore, Multi-Criteria Decision Making (MCDM) has been applied to estimate the infrastructure's element performance during the operation [2]. Recent research, for finding the sustainability index has been focused on several subsets of MCDM to prepare a decision support system such as Preference Selection Index (PSI) [2, 3]. This method is typically chosen when there are no significant weights for attributes. In other research, In order to mine the effective parameters for the indexing model based on Pareto concept and making pair-wise comparison questionnaire serving Analytical Hierarchy Process (AHP) requirements to find the

weights of them [4]. AHP method has been adopted for the calculation of the Sustainability Assessment Index (SAI) based on normalized key performance indicators and their weight, which has been calculated by AHP [5]. The theoretical framework developed for extracting the Sustainability Index (SI) is a function that comprises Wellbeing, Resource, Compliance, and resources [6]. For qualitative assessment in the AHP process, recent research has been used the Likert scale and extract sustainability level [7]. The results led to the development of a Sustainability Index model (SIM) useful to assess manufacturing performances or maintenance procedures during the operation with rank alternatives [8]. Also, these results have been developed with respect to the evaluation criteria and the weights of the criteria to prioritize the network systems [9]. These indexes could be extracted for prediction by neural network method to decision making with considering probable scenarios [10]. Since, future generations are important for these studies, prediction, and monitoring of the results with any scenario is necessary for decision-makers. Therefore, sustainable development is a comprehensive solution for the present and future of humans [11].

Based on recent research, the sustainable index is an important index for the bridge management system and green infrastructures and green cities.

## 2. AIM OF THE RESEARCH

This paper presents an approach to developing a practical indexing model in terms of resource management

| Subject  | Extracting index method              | Subset method  |
|--|--------------------------------------|--|
| Coastal climate adaptation planning and evolutionary governance: Insights from Homer, Alaska. [1]  | Interviews with key informants       | -  |
| Development of Sustainable Performance Index (SPI) for Self-Compacting Concretes (SCC) [2]   | MCDM                                 | SPI  |
| Application of preference selection index method for decision making over the design stage of production system life cycle [3]   | MCDM                                 | PSI  |
| Sustainability index for highway construction projects [4]   | MCDM                                 | AHP  |
| Development of sustainability assessment index for machine tools [5]   | MCDM                                 | AHP  |
| Development of a multidisciplinary approach to compute sustainability index for manufacturing plants - Singapore Assessing the feasibility of using the heat demand-outdoor perspective temperature function for a long-term district heat demand forecast [6] | MCDM                                 | AHP  |
| Groundwater sustainability assessment framework: A demonstration of environmental sustainability index for Hanoi [7]   | MCDM                                 | AHP  |
| Developing a sustainability index for Mauritian manufacturing companies [8]  | Rank correlation-Ordinal association | Kendall coefficient  |
| Life cycle aggregated sustainability index for the prioritization of industrial systems under data uncertainties [9]   | LCC                                  | Net present value (NPV), internal return rate (IRR), and pay-back time (PT)) |
| Predicting subjective measures of walkability index from objective measures using artificial neural networks [10]  | ANN                                  | -  |
| Comparison of sustainability models in development of electric vehicles in Tehran using fuzzy TOPSIS method [11]   | MCDM                                 | fuzzy TOPSIS   |
| The Lisbon ranking for smart sustainable cities in Europe [12]   | Feature selection                    | principal component analysis-Sensitivity analysis                            |

TABLE 1. Research method and index extract.

and optimization. It will prepare a decision support system for managers that leads to wider uptake welfare during the infrastructure life cycle for their real owner, people. Since this plan optimizes resource consumption, therefore it will keep the environment safe and prevent nature from contamination. Based on this framework, the manager will make an optimized decision for the material and shape of their structures' element during the design. This framework would also be useful for maintenance managers to decide about their maintenance plan with a comparison between the elements and components of the railway network.

### 3. RESEARCH CONTRIBUTION

This paper is structured as follows:

- Data collection from overall monitoring, such as visual inspection.
- Variance measurement and extracting the data value
- Defining the reliability index
- Define the effective parameters in terms of sustainability with a questionnaire form
- Correlation analysis between the reliability index and sustainable parameters
- Prepare a sustainable model for maintenance managers

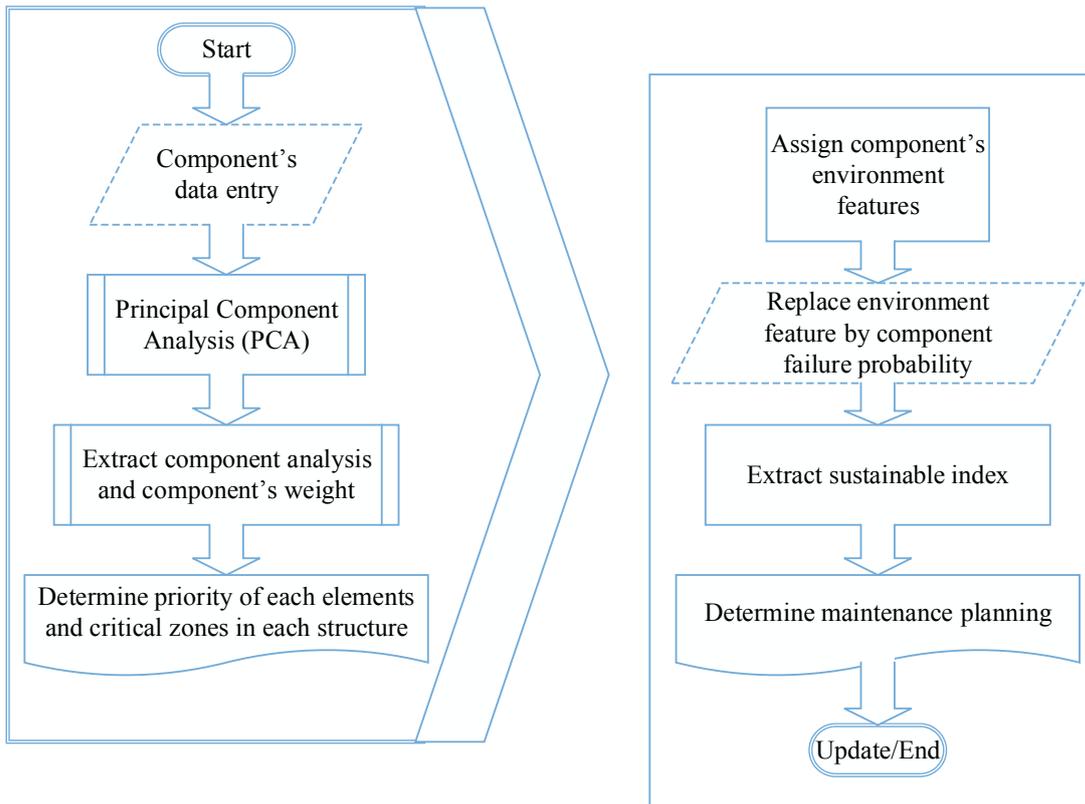


FIGURE 1. Flow diagram of extracting sustainable index.

#### 4. METHODOLOGY

This research would establish a comprehensive mathematical method for extracting the sustainability index for infrastructure as follows.

- Defect detection and extracting the probability of failure
- Principal Component Analysis (PCA) and the Value of Information for reducing the useless data
- Environment features and extracting the sustainability parameters
- Replacing the roots of the defect (environment features) by the defect and extracting the sustainability index for case study
- The weight of each parameter shows the importance of the index elements. Based on these weights, a new construction plan and materials regarding their maintenance method will be updated.

The framework of extracting sustainable index has been shown as follows diagram.

#### 5. DATA COLLECTION

This research would be establishing a comprehensive mathematical method for extracting the sustainability index to assess infrastructure in terms of sustainability. This research has been focused on the Tehran Subway Bridge for monitoring and quality assessment

during the operation. Based on the inspection checklist, five bridges are determined and inspected as a sample by expert inspectors.

These bridges have been assessed by the items of the national code [14]. Parameters with subjective attitudes have been ranked based on their environmental status and the other geotechnical features between 1 to 4 or 1 to 5. Some of these parameters would be determined according to the observed defects in each element of the bridge. Since these parameters are not the same range, they will be normalized by formula as follows.

$$Z = \frac{x - \mu}{\sigma} \quad (1)$$

In this formula,  $\mu$  is the arithmetic mean and  $\sigma$  is the standard deviation of the distribution. Row data after normalization process transfer to the Principal component analysis (PCA) framework. Based on the Scree plot and their Eigenvalue, three components have the most value of information.

Observation from inspection determines the status of the bridge's elements as follows. Some of these elements related to defects and they were affected by environments' features according to the last table.

Sustainable structures during their life cycle have to fulfill the thresholds regarding their components and the environment's features based on their weight. By considering these tools, it will be possible to manage assets along their lifetime in a more sustainable and efficient way [15]. Therefore, PCA has been used

|                                | Component |       |       |
|--------------------------------|-----------|-------|-------|
|                                | 1         | 2     | 3     |
| Liquefaction (Li)              | .825      | .448  | -.084 |
| Land slide (Ls)                | -.012     | -.681 | .258  |
| Rock fall (Rf)                 | -.811     | -.252 | .031  |
| Thunderstorm (Th)              | .313      | .034  | .931  |
| Flood (Fl)                     | .675      | -.475 | .484  |
| Climate (Cl)                   | .825      | .448  | -.084 |
| Density Of Soil (Ds)           | -.558     | .648  | .306  |
| Underground void Distance (Ud) | -.553     | .506  | .508  |

TABLE 2. Component Matrix.

| Defects type   | Dependent element                  | Cl | Fl | Th | Ls | Li | Ds | Ud | Rf |
|--|------------------------------------|----|----|----|----|----|----|----|----|
| Deck stability   | Deck                               |    |    | ●  |    |    |    |    | ●  |
| Drainage   | Drainage/Pier/<br>Deck/ Foundation | ●  | ●  |    |    |    |    | ●  |    |
| Foundation/embankment<br>settlements   | Foundation/Abutment                | ●  | ●  |    | ●  | ●  | ●  | ●  |    |
| Railway track geometry defect<br>(Gage widening, Alignment,<br>Twist, Longitudinal level [13]) | Railway track                      | ●  |    |    |    |    |    |    |    |
| Bridge thermal movement  | Deck/Railway track                 | ●  |    |    |    |    |    |    |    |
| Temperature stress cycling   | All bridge's element               | ●  |    |    |    |    |    |    |    |
| Deterioration  | All bridge's element               | ●  |    |    |    |    |    |    |    |
| Scour  | Pier/Foundation                    |    | ●  |    |    |    | ●  |    |    |

TABLE 3. Impact of environment features on bridge.

| Bridge number | Defect on<br>railway track | Defect on<br>deck | Defect on<br>Abutment | Defect on<br>Pier | Defect on<br>foundation |
|---------------|----------------------------|-------------------|-----------------------|-------------------|-------------------------|
| 1             | 6                          | 0                 | 0                     | 0                 | 0                       |
| 2             | 3                          | 1                 | 0                     | 0                 | 0                       |
| 3             | 7                          | 4                 | 1                     | 0                 | 0                       |
| 4             | 1                          | 3                 | 0                     | 0                 | 0                       |
| 5             | 0                          | 4                 | 1                     | 0                 | 0                       |
| 6             | 1                          | 3                 | 0                     | 0                 | 0                       |
| 7             | 1                          | 0                 | 0                     | 0                 | 0                       |

TABLE 4. Number of registered defects based on bridge's elements.

| Bridge<br>number | Number<br>of defect<br>on element<br>[Table 4] | Defect<br>type         | Approximate<br>volume (m <sup>3</sup> ) | Probability<br>of defect<br>[Table 4] (%) | Impact<br>[Table 2 & 3] | Sustainability<br>index  |
|------------------|--|------------------------|---|---|-------------------------|--------------------------|
| 4                | 3  | Instability<br>of deck | 709.8                                   | 0.42                                      | 0.931Rf+.031Th          | 0.42(0.931<br>Rf+.031Th) |

TABLE 5. Sustainability index for a bridge in case study.

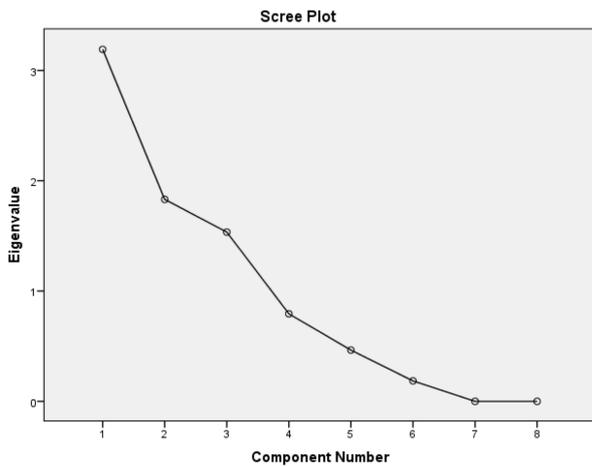


FIGURE 2. Scree plot for component's eigenvalue based on PCA analysis.

and 3 components have been extracted by the PCA method for 8 environment features with their weights as follows. Based on Table 2, Li represents the probability of liquefaction and also other environmental features such as Ls and Rf and the other. This method will keep the valuable data and reduce the main by ranking the parameters in each component [16].

It is necessary for monitoring the mean value and variance changes for each feature, which would be important for sustainable structures. For example, increasing the mean value for flood shows the increasing probability of the Scour surrounding the piers of the bridge. Since climate change would be effective in increasing the crack growth of concrete elements, these features would be related to these types of defects. These relations are shown as follows.

For finding the sustainability index, it is necessary to find the risk according to weight for their defects. The probability of failure will be extracted as the following formula [17]. For each bridge (see Table 4), V is an approximate measure representative of their volume regarding length (L) and width (W). The number of defects in each element has been determined by visual inspection [18] (F) based on Table 4. This shows that a larger bridge has more capacity for a defect in its components when compared with a smaller one. Probability of failure (P-f) are normalized by dividing them with the average of all failure densities.

$$P_f = \frac{\sum F}{\int V dv} \quad (2)$$

$$V \approx L \times W \quad (3)$$

Based on Table 3 and Table 2, the sustainability index has been presented as follows. Bridge number 4 in this step is a sample for calculating the sustainability index for the instability of the deck. With this result, it is necessary to consider the risk of reinforced concrete elements and their defects during

the operation with regard to rockfall and thunder. It is obvious for other bridges in the same area, impact factor is the same but the probability of defect will change based on their structural features. Therefore, the sustainability index will change for each bridge, and the final grade will determine by their environment features and structures.

## 6. CONCLUSION

The sustainability index would be a combination of environmental features to make a decision during the operation or designing of the structure. In this approach after putting up the probability of environment features such as rockfall or climate, finding the location, material and bridge structure type would be possible by benchmarking and expert judgments. With this index it is possible to locate the bridge with a minimum life cycle cost and maximum sustainability. Finding the optimum plan with regard to climate change and seasons is also possible during the operation. For example, in winter railway track face with a wide range of changes in some area and this issue consequently effects on increasing the railway track failure such as rail and fastening system breakage. Therefore, finding the proper place, the best material and optimum maintenance plan would be possible with the sustainability index.

## ACKNOWLEDGEMENTS

Acknowledgments This work was partly financed by FCT / MCTES through national funds (PIDDAC) under the R&D Unit Institute for Sustainability and Innovation in Structural Engineering (ISISE), under reference UIDB / 04029/2020. This project has received funding from the European Union's Horizon 2020 research and innovation programme under grant agreement No769255. The sole responsibility for the content of this publication lies with the authors. It does not necessarily reflect the opinion of the European Union. Neither the Innovation and Networks Executive Agency (INEA) nor the European Commission are responsible for any use that may be made of the information contained therein.

## REFERENCES

- [1] S. Jeff Birchall. Coastal climate adaptation planning and evolutionary governance: Insights from Homer, Alaska. *Marine Policy* **112**, 2020. <https://doi.org/10.1016/j.marpol.2018.12.029>.
- [2] A. S. Reddy, P. R. Kumar, P. A. Raj. Development of Sustainable Performance Index (SPI) for Self-Compacting Concretes. *Journal of Building Engineering* **27**, 2020. <https://doi.org/10.1016/j.jobbe.2019.100974>.
- [3] Attri, R., & Grover, S. (2015). Application of preference selection index method for decision making over the design stage of production system life cycle. *Journal of King Saud University - Engineering Sciences*, 27(2), 207-216. <https://doi.org/10.1016/j.jksues.2013.06.003>.

- [4] A. H. Ibrahim, M. A. Shaker. Sustainability index for highway construction projects. *Alexandria Engineering Journal* **58**(4):1399-411, 2019. <https://doi.org/10.1016/j.aej.2019.11.011>.
- [5] N. Sihag, K. Singh Sangwan. Development of a sustainability assessment index for machine tools. *Procedia CIRP* **80**:156-61, 2019. <https://doi.org/10.1016/j.procir.2019.01.018>.
- [6] N. Venkataraman, K. Muthusamy. Development of a multidisciplinary approach to compute sustainability index for manufacturing plants - Singapore perspective. *Energy Procedia* **143**:327-35, 2017. <https://doi.org/10.1016/j.egypro.2017.12.692>.
- [7] N. T. Bui, A. Kawamura, D. D. Bui, et al. Groundwater sustainability assessment framework: A demonstration of environmental sustainability index for Hanoi, Vietnam. *Journal of Environmental Management* **241**:479-87, 2019. <https://doi.org/10.1016/j.jenvman.2019.02.117>.
- [8] D. Beekaroo, D. S. Callychurn, D. K. Hurreeram. Developing a sustainability index for Mauritian manufacturing companies. *Ecological Indicators* **96**:250-7, 2019. <https://doi.org/10.1016/j.ecolind.2018.09.003>.
- [9] J. Ren. Life cycle aggregated sustainability index for the prioritization of industrial systems under data uncertainties. *Computers & Chemical Engineering* **113**:253-63, 2018. <https://doi.org/10.1016/j.compchemeng.2018.03.015>.
- [10] A. Sabzali Yameqani, A. A. Alesheikh. Predicting subjective measures of walkability index from objective measures using artificial neural networks. *Sustainable Cities and Society* **48**, 2019. <https://doi.org/10.1016/j.scs.2019.101560>.
- [11] F. Samaie, H. Meyar-Naimi, S. Javadi, et al. Comparison of sustainability models in development of electric vehicles in Tehran using fuzzy TOPSIS method. *Sustainable Cities and Society* **53**, 2020. <https://doi.org/10.1016/j.scs.2019.101912>.
- [12] A. Akande, P. Cabral, P. Gomes, et al. The Lisbon ranking for smart sustainable cities in Europe. *Sustainable Cities and Society* **44**:475-87, 2019. <https://doi.org/10.1016/j.scs.2018.10.009>.
- [13] I. Soleimanmeigouni, A. Ahmadi, A. Nissen, et al. Prediction of railway track geometry defects: a case study. *Structure and Infrastructure Engineering* **16**(7):987-1001, 2019. <https://doi.org/10.1080/15732479.2019.1679193>.
- [14] Transportation research center. Technical Identification of bridge, Iranian national code 367, Department of strategic planning, 2007.
- [15] J. Matos, A. Solgaard, C. Santos, et al. Life Cycle Cost, As a Tool for Decision Making on Concrete Infrastructures. High Tech Concrete: Where Technology and Engineering Meet2018. p. 1832-9. [https://doi.org/10.1007/978-3-319-59471-2\\_210](https://doi.org/10.1007/978-3-319-59471-2_210).
- [16] C. Hanley, J. C. Matos, D. Kelliher, et al. Integrating multivariate techniques in bridge management systems. *Journal of Structural Integrity and Maintenance* **2**(3):143-51, 2017. <https://doi.org/10.1080/24705314.2017.1354280>.
- [17] B. Paulo. P. B. Lourenço, J. M. Lajevardi. Quality control index survey for railway bridge health monitoring. IABSE Symposium, Guimaraes 2019: Towards a Resilient Built Environment Risk and Asset Management - Report, 2019.
- [18] M. Moore, B. Phares, B. A. Graybeal, et al. Reliability of Visual Inspection for Highway Bridges, Volume I: Final Report, Research, Development, and Technology Turner-Fairbank Highway Research Center, 2001.