

**Review paper**

**TRIBOELECTRIC NANOGENERATORS (TENG):  
FACTORS AFFECTING ITS EFFICIENCY AND APPLICATIONS**

**Deepak Anand, Ashish Singh Sambyal, Rakesh Vaid**

Department of Electronics, University of Jammu, Jammu-180006, India

**Abstract.** *The demand for energy is increasing tremendously with modernization of the technology and requires new sources of renewable energy. The triboelectric nanogenerators (TENG) are capable of harvesting ambient energy and converting it into electricity with the process of triboelectrification and electrostatic-induction. TENG can convert mechanical energy available in the form of vibrations, rotation, wind and human motions etc., into electrical energy there by developing a great scope for scavenging large scale energy. In this review paper, we have discussed various modes of operation of TENG along with the various factors contributing towards its efficiency and applications in wearable electronics.*

**Key words:** *TENG (Triboelectric nanogenerator), PTFE (Poly tetra fluoro ethylene), TET (triboelectric textile), STET (single layer triboelectric textile), PDMS (polydimethyl siloxane), PMMA (polymethyl methacrylate)*

1. INTRODUCTION

With the increase in the energy requirement, various non-renewable resources of energy are depleting day by day causing serious environmental conditions. Solar and wind energies are the targeted renewable sources of energy to provide power in the gigawatt scales. High power density, high efficiency and low cost are the main requirements to harvest these energy sources. For the welfare of the society, it is necessary to find a new and high efficient energy technology that can be able to harvest the energy available in the environment which could be harvested easily to act as prominent source for energy harvesting system [1-4]. All these power sources should be easily available, sustainable, and maintenance-free as well as pollution free. Most of the present day electronic devices use batteries as external power sources with a short span of life time. Till date electromagnetic-induction, piezoelectric and electrostatic effects were the main mechanisms used for major energy harvesting techniques developed during the last few decades [5-11]. More recently, a new energy technology has been invented for harvesting environmental energy known as tribo-electric nanogenerators (TENG) which converts the ambient mechanical energy into electrical energy [12-16]. TENG

---

Received February 24, 2021

**Corresponding author:** Rakesh Vaid


Department of Electronics, University of Jammu, Jammu 180006, (J&K), India

E-mail: rakeshvaid@ieee.org

works on the principle of triboelectrification in conjunction with electro-static induction. The concept of TENG was demonstrated by Wang et. al in the year 2012 and since then it has attracted the energy industry to meet the large scale energy demand. Various device structures based on triboelectric-effect and electro-static induction have been reported utilizing mechanical energies from vibrations [17-20], human-motions [21-22], rotation [23-24], wind [25-26], and walking [28]. In this review paper, we have described an overview of the progress in the TENG based devices. We have also discussed the various modes of operation, energy harvesting source along with different parameters affecting its efficiency and applications.

## 2. FUNDAMENTAL MODES OF TENG

Charge generation takes place between two different materials having distinct affinity to electrons when they are brought in contact with each other and then separated is known as triboelectric effect. When the materials are separated from each other it results in the generation of potential on the surface of two materials. On the other hand, electrostatic induction is the phenomenon of generating electricity when the electrons from one electrode flow to the other electrode through external load to bring equilibrium in the potential difference. In TENG both triboelectric effect and electrostatic induction are used to convert the mechanical energy into electrical energy. Figure 1 below demonstrates the various fundamental modes of TENG such as vertical- contact separation mode [37-40], sliding mode [41-42], single electron mode [43-46] and free- standing triboelectric-layer mode [47-52].

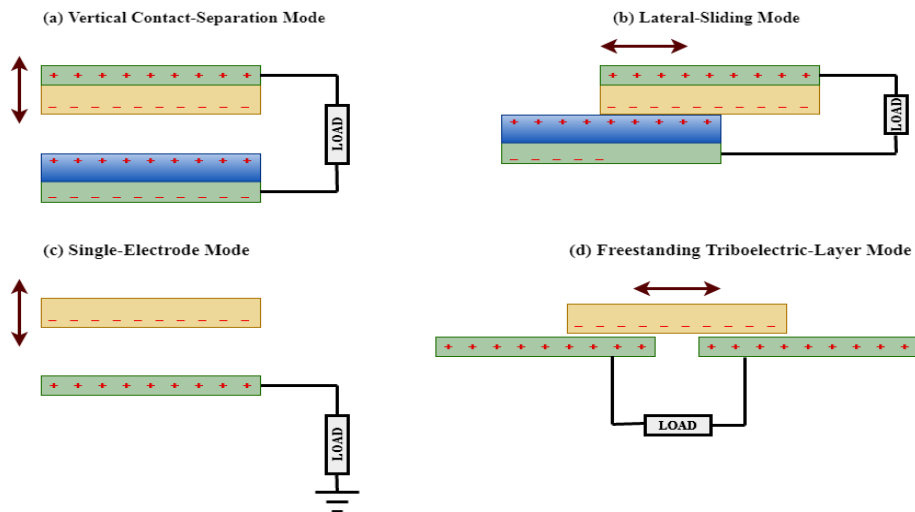

**Fig. 1** Fundamental modes of TENG a) The vertical contact separation mode b) The sliding mode c) the single electron mode d) The free- standing mode

### 2.1. Vertical contact-separation mode

The process of energy conversion by triboelectrification was first demonstrated by Zhu et. al., in January 2012 [13]. The operation of TENG can be explained on the basis of coupling

between electrostatic induction and contact electrification. Figure 2(a-b) clearly indicates the process of generation of electricity using contact-separation mode. The materials used for vertical contact-separation mode include PMMA (poly methyl methacrylate) and kapton. Both open-circuit voltage and short circuit current have been demonstrated in this mode of TENG. In the open circuit condition, when no force is applied between these two materials, no electric potential difference is produced as shown in figure 2(a). But when an external force is applied, transfer of charge takes place from one surface to another as soon as these two materials come in contact with each other. Because of triboelectric-effect, electrons will be transferred from PMMA to the kapton surface thereby making PMMA as positive electrode and kapton as negative electrode (refer Figure 2(a)). Further, when these two materials are separated with the release of force, a potential difference is created between these two electrodes. The open-circuit voltage ( $V_{oc}$ ) so produced can be expressed as: -

$$V_{oc} = \sigma d / \epsilon_0 \quad (1)$$

Where,  $\sigma$  is the triboelectric charge density;  $\epsilon_0$  is the permittivity and  $d$  is the distance between the two surfaces.

$V_{oc}$  can reach its maximum value when the force is released of the free space. Now, when the force is applied again, the potential difference decreases and reaches its minimum value when the two materials come in contact/closer to each other. This depicts the whole cycle of generating electricity in vertical contact-separation mode. Under the short circuit condition, the electrons flows from top electrode to the bottom electrode, so as to balance the electric potential difference so generated resulting in the flow of instantaneous current in the process of releasing. Thus, the positive charge will accumulate on the top electrode and negative charge will accumulate on the bottom electrode. The charge density during full released process can be expressed as:

$$\sigma' = \sigma d' \epsilon_{rk} \epsilon_{rp} / d_1 \epsilon_{rp} + d' \epsilon_{rk} \epsilon_{rp} + d_2 \epsilon_{rk} \quad (2)$$

Where,

$\epsilon_{rp}$  = relative permittivity of PMMA;  
 $d_1$  = thickness of the kapton layer;

$\epsilon_{rk}$  = relative permittivity of kapton  
 $d_2$  = thickness of the PMMA layer

Now, when the force is applied again, the electrons will move from bottom electrode to the top electrode reducing the induced charge due to which a negative instantaneous current appears. The whole induced charge gets neutralized when these layers come in contact with each other.

## 2.2. Sliding mode

Siding mode of operation was demonstrated by Wang et al in the year 2013 [42] in which two surfaces slide over one another in the lateral direction. The mechanism of generation of electricity has been demonstrated in Figure 3 (I-IV). In this case one layer is of PTFE (Poly tetra fluoro ethylene) and the other layer consists of Nylon plate. In the initial position, when the two plates are placed over one another having full contact with each other, no transfer of electron takes place from Nylon to PTFE, thus no potential difference is generated between the two electrodes as shown in figure 3(I). When the positively charged top surface starts sliding in the outward direction, relative displacement in the lateral direction takes place. Thus, PTFE electrode will be having a higher potential as compared with the Nylon electrode, hence the electrons from the PTFE film will move

towards the Nylon film through the external load, until full mismatch, as shown in Figure 3(II-III), the potential difference and charge transfer will reach the maximum value. Now, the Nylon plate is moved in the inward direction and the whole process will get reserved and the electrons moved from Nylon film to PTFE film through external load which produces a negative current when the equilibrium is achieved, no transfer of charge take place and the two plates reaches its original position. Several advantages of sliding mode have been observed as compared to vertical contact separation mode such as higher energy conversion efficiency and increased power enhancement.

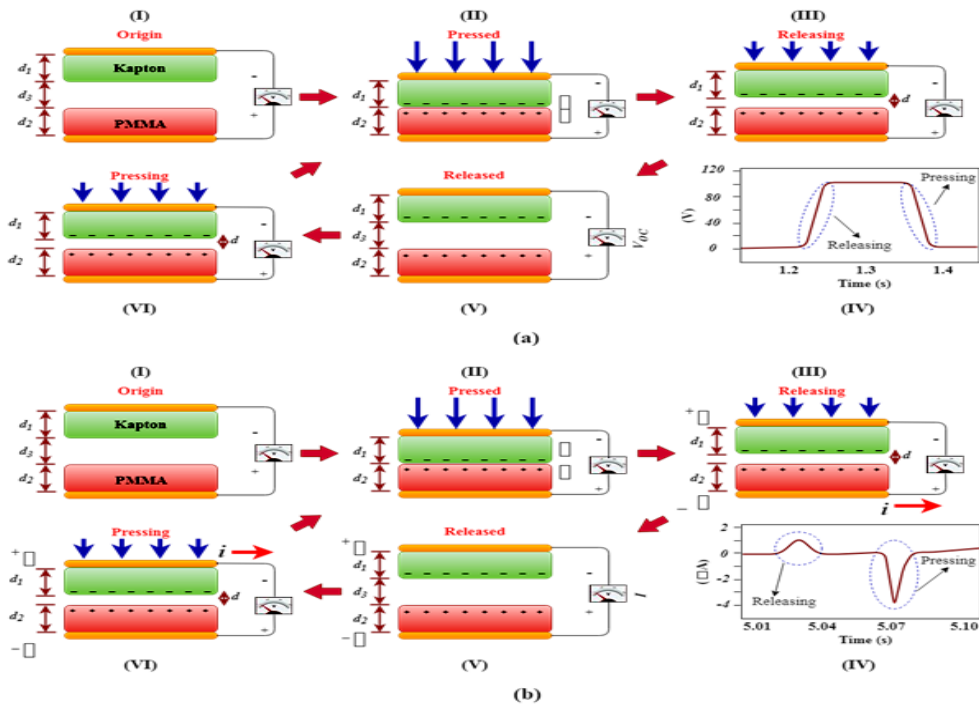


Fig. 2 (a-b) Process of generation of electricity using contact-separation mode of TENG


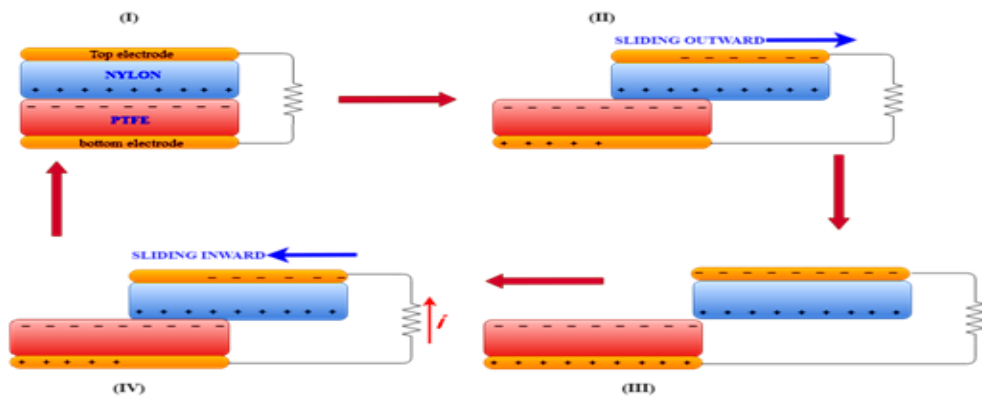


Fig. 3 (I-IV) The basic mechanism of generation of electricity

### 2.3. Single electron mode

Figure 4(a) show the single electron mode operation [45] consisting of PDMS layer having micro pyramids over its surface serving the purpose of providing friction and the other contact surface consists of human skin. The layer of PDMS is deposited on the ITO coated PET substrate and with change in the distance between the two surfaces, transfer of charge take place in between ITO and the ground and hence flow of electrons take place.

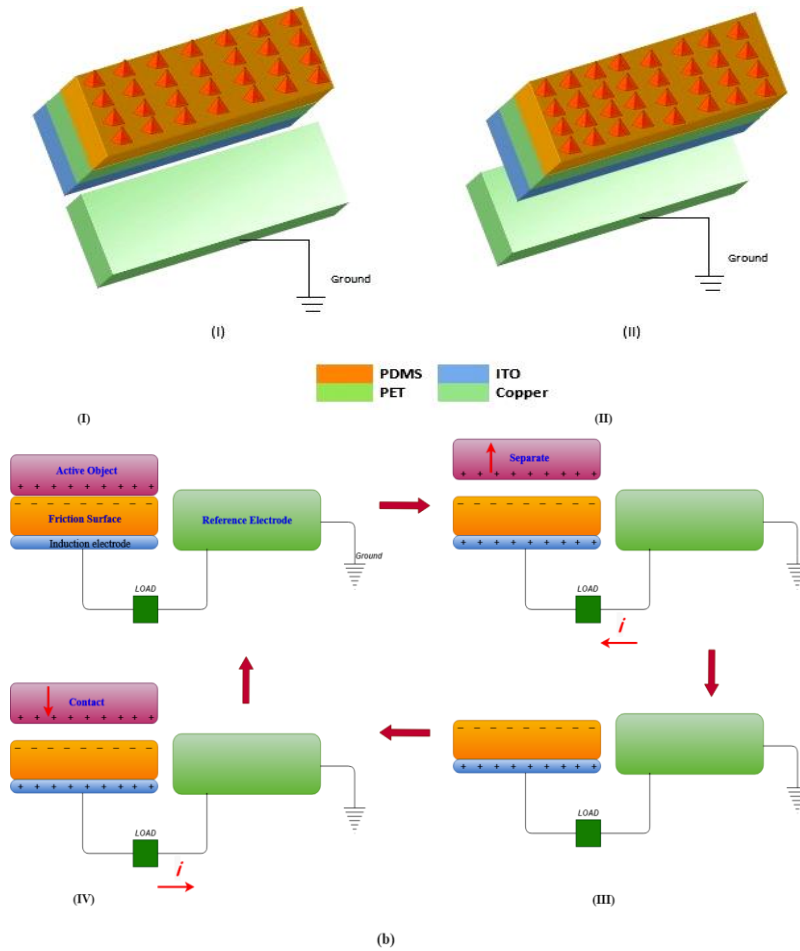


**Fig. 4** (a) Schematic illustration showing the single electron mode TENG [45], (b) The electricity generation cycle

Figure 4(b) indicates the mechanism of generation of electricity in the single electron mode. With the bringing of a finger near the PDMS surface, a negative charge appears on its surface as PDMS is more negatively charged as compared to human skin and thus more electrons will be transferred from the human skin to the PDMS surface. This negative charge can be preserved on the PDMS surface due to its insulating nature. Now,

when the finger is separated from the PDMS surface, a potential difference between the ITO and the reference electrode gets generated. This results in the flow of free electrons from the ITO electrode to the ground/reference electrode to maintain the equilibrium as shown in Figure 4(b). Again, when the finger is made to approach the PDMS, the movement of free electron takes place from the reference electrode to the ITO resulting in the production of negative current/voltage. This is how the cycle gets completed for the single-electron mode operation.

#### 2.4. Freestanding triboelectric layer mode

The free standing triboelectric layer mode have distinct advantages over the other modes of operations as far as its versatility and applicability in the process of energy harvesting from a moving object or from the motion of human walking without an attached electrode. This mode also has very high energy conversion efficiency and high robustness. In this mode, the generation of electricity depends upon the change in position of the tribo charged surface between two electrodes resulting in change of induced potential difference as depicted in Figure 5(a). The main structure consists of two metal films and a free-standing dielectric layer. When the FEP (Fluorinated ethylene propylene) layer is aligned with the left-electrode of aluminum (Al) a negative charge will be developed on the inner surface of the FEP layer and a positive charge on the left-electrode surface as shown in Figure 5(b).

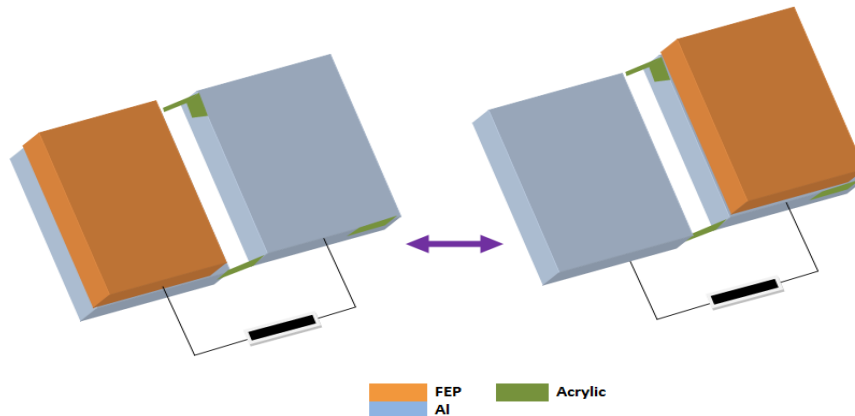

**Fig. 5** (a) Two electrodes resulting in change of induced potential difference in the free-standing triboelectric layer mode

When the FEP layer slides towards the right-electrode, the potential difference between the left and the right electrodes will be reduced causing the flow of current from left electrode towards the right electrode as shown in Figure 5(b). When the FEP layer reaches on the top of right electrode, no electric potential difference appears and hence no current flows. Finally, when the FEP layer slides towards the left electrode, an electric potential difference will appear between the two electrodes, causing flow of current between them, thus completing the whole cycle of generating electricity in free-standing triboelectric layer mode.


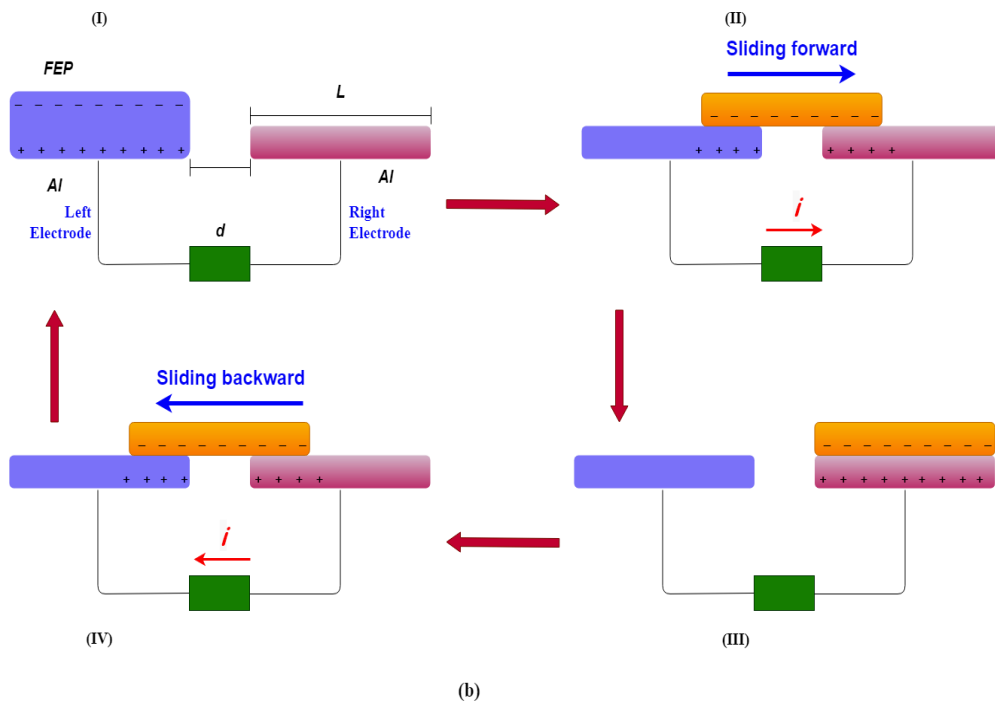


Fig. 5 (b) Working principle of a free-standing triboelectric layer mode

### 3. ENERGY HARVESTING SOURCES USING TENG

#### 3.1. Energy harvesting through waste water flow

The energy from the waste water flow can be harvested using a rotatory TENG as shown in Figure 6. It consists of PTFE (Poly tetra fluoro ethylene) and Nylon being the tribo-electric materials. With the use of triboelectric effect and electrostatic induction, energy can be harvested by contact and sliding modes of the TENG operation. The devices so far demonstrated has the ability to light up 50 LEDs connected in series [46]. When the water is allowed to flow through the tube, the fan connected to the shaft starts rotating. As shown in Figure 6, different triboelectric materials are placed on the eight different poles. With the rotation of the shaft, the triboelectric materials come in contact with each other thereby causing the flow of current [46]. Energy from the water waves can be harvested as demonstrated by Jiang et al., [47] where they designed a spring based TENG to store the potential energy present in the water waves. Actually, the energy is produced by translating the low frequency wave motion energy of water into high frequency kinetic energy by the use of a spring. In order to achieve higher efficiency, the various parameters like spring rigidity and spring length must be taken into account. Water driven TENG based on water electrification has been demonstrated and developed by Kim et al., [48] which are capable of producing energy even under adverse environmental conditions and rarely affected by humidity and friction.

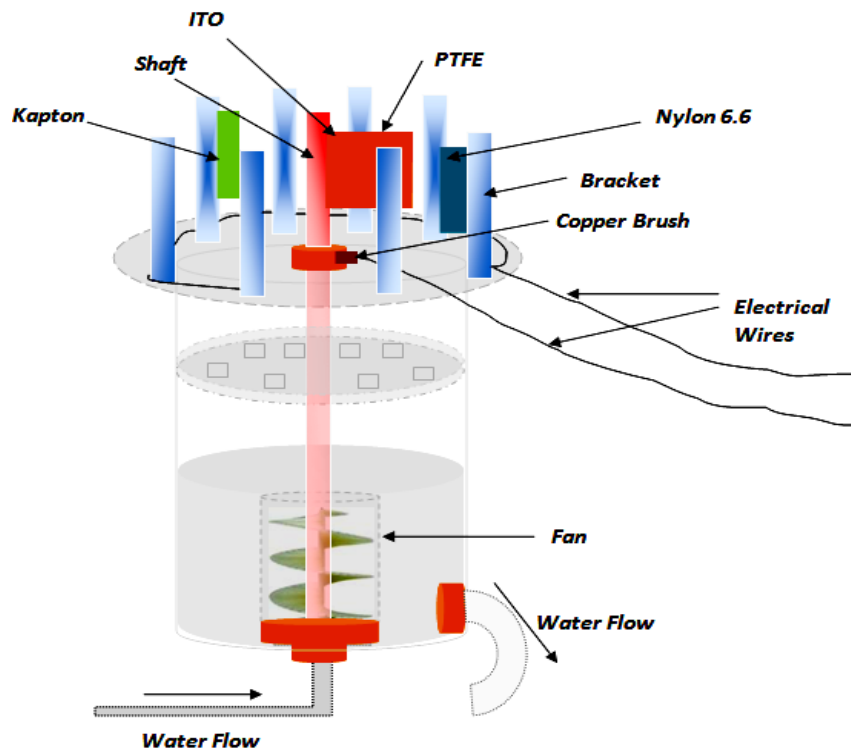

**Fig. 6** Schematic diagram of a Rotatory TENG [46]

### 3.2. Energy harvesting from triboelectric textile

One of the unique sources of energy harvesting takes place through human motion using TET (triboelectric textile). Because of triboelectric effect, the transfer of charge takes place between the skin and the triboelectric textile. In order to obtain a voltage  $\sim 500$  V and a short circuit current of 600 mA, silicon and NI-coated polyester had been used as triboelectric materials as single layer triboelectric textile (STET). On the other hand, for a voltage of  $\sim 540$ V and a short circuit current of 140 mA was obtained for a 5x5cm square sized double layer triboelectric textile which is capable of illuminating 100 LEDs connected in series [49] with stretching, rubbing and pressing using folded TET. On stretching, the layer of materials comes in contact with each other and they retain the original shape by removing the external forces. Silk and Si-rubber, when comes in contact with each other on stretching results in the generation of electricity due to the transfer of charge between the two layers as depicted in Figure 7. This type of TET is capable of producing electricity that can light 54 LED bulbs [50].



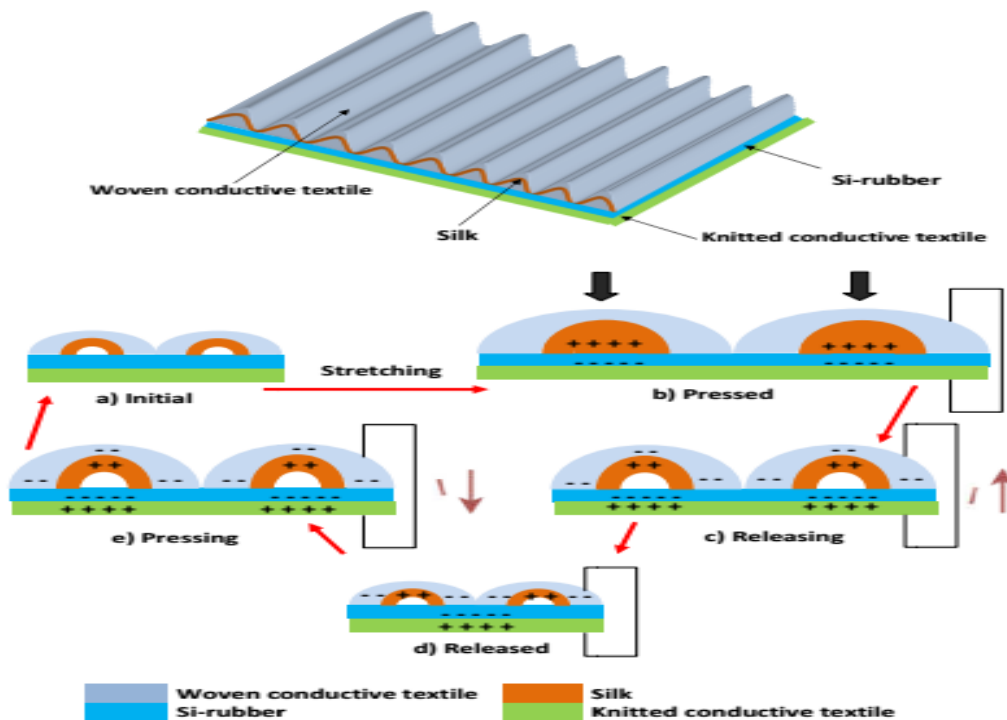



Fig. 7 Working principle of TET

### 3.3. Energy harvesting from human walking

The energy harvesting from a foot-fall was analyzed and demonstrated by Te-Chien Hou and others experimentally [51] in the year 2013. The fabrication of shoes soles using triboelectric materials with proper use of spacers has been done by using elastic sponge as a spacer. The variations in the size and thickness of the spacer varied the output so generated. The energy converted from human walking into electricity has generated an electrical output which is capable of illuminating 30 LEDs connected in series. It has also been observed that an increase in the number of spacer reduces the output voltage because of a decrease in the effective area of contact.

### 3.4. Magnetic force and finger tip pressure driven TENG


The TENG driven by magnetic force and finger tip pressure was designed by Taghavi et al [52] as shown in the Figure 8. With the application of pressure on the upper part, the upper pair of materials comes in contact with each other, whereas when the pressure is removed the lower part is pushed in upward causing the lower pair of materials to come in contact with each other due to magnetic force. This contact and separation causes the transfer of charge between the materials resulting in the flow of electric-current.

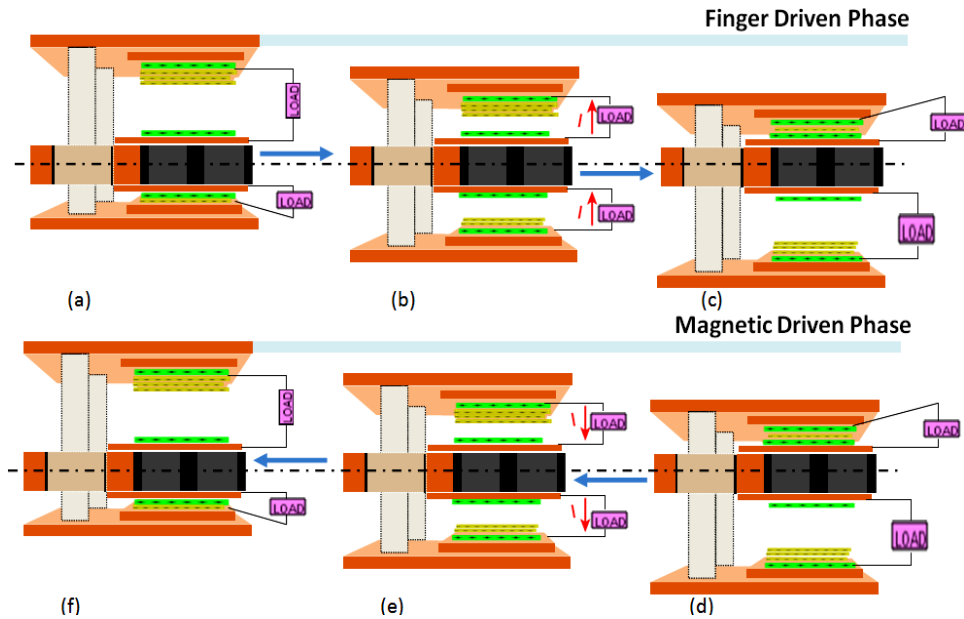

**Fig. 8** Mechanism of contact keys driven by finger tips and then by magnetic-force [52]

### 3.5. Pendulum and comb shaped electrodes based TENG

Another triboelectric nanogenerator that can be fabricated using contact electrification and electrostatic induction is using by a comb-shaped electrode for harvesting energy. More the number of comb electrode arms, the more will be the production of energy. Even the rougher surface shows higher output as compared to the flat surface [53]. The working of this TENG is basically based on the oscillations of a pendulum. With the application of force to the pendulum, a to and fro motion is generated which produces multiple output for a single input. Many setups were created based on the surface roughness and nanowires showing maximum efficiency. The efficiency of TENG increases with an increase in the surface roughness because the surface roughness ultimately increases the area of contact [54]. As shown in figure 9, when one material is placed on the top of pendulum and the other material is placed

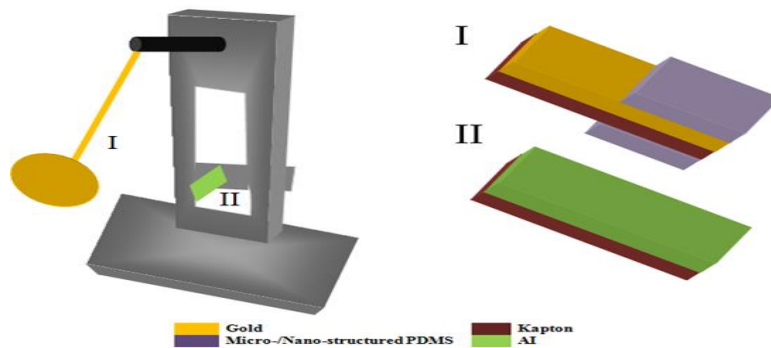

**Fig. 9** TENG consisting of two parts I and II (I is movable and II is fixed)

on the frame, with the starting of oscillations, the contact and separation take place between the two materials resulting in charge unbalancing thereby producing the flow of electric-current [54].

#### 4. EFFECT OF VARIOUS FACTORS ON THE EFFICIENCY OF TENG

##### 4.1. Effect of humidity

The generation of charge is greatly influenced by humidity as well as temperature. It has been noticed that the generation of charge between various triboelectric materials increased up to 20% with the decrease in the relative humidity whereas increase in the humidity has adverse effect on the efficiency of triboelectric materials and on the triboelectric effect [55]. A triboelectric nanogenerator can also be fabricated which works on a wide range of humidity without causing change in its electrical output. Such a TENG is consists of triboelectric materials which are water reluctant and hence can be utilized for low and high humidity pendulum conditions [56].

##### 4.2. Effect of temperature

Temperature also has an impact on the output of triboelectric nanogenerator as observed by various researchers. It has been observed that with an increase in temperature, the ductility of triboelectric material increases while the stiffness decreases whereas on decreasing temperature reverse process is observed. From the graph shown below in Figure 10, it is observed that the output voltage decreases beyond a temperature of 300<sup>o</sup>K and the output also varies over a wide range of temperature. U<sup>+</sup> denotes average positive peak voltage and U<sup>-</sup> denotes the average negative peak voltage respectively [57].

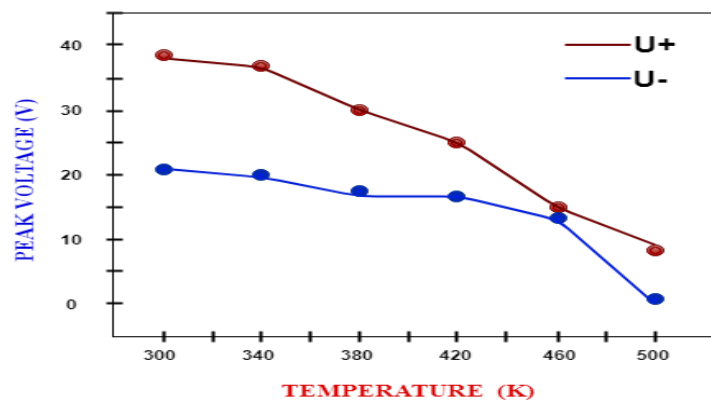


Fig. 10 Variations of peak voltage with temperature [57]

##### 4.3. Effect of surface structure patterning

Various triboelectric materials like PDMS (polydimethyl siloxane) and PMMA (polymethyl methacrylate) can be used for the fabrication of TENG with nanopatterns fabricated on their surface using photolithography. Different types of patterns like

hexagonal, pillar, and line can be printed and it has been observed that hexagonal patterns show maximum output voltage as compared to the other patterns. Triboelectric materials with smaller width pillars show higher output as compared with the large width pillar shaped patterns [58]. Seol et al [59] has demonstrated that the effect of pressure on the surface of triboelectric materials result in deformation which has an impact on the output of the TENG devices. It has been observed that high pressure applications result in increased output because of the increase in contact surface thereby causing an increase in the maximum charge density.

## 5. APPLICATIONS OF TENG

### 5.1. TENG as a micro-scale power source

The main and most important purpose for developing TENG is to act as a power source for small scale electronic devices and sensors applications. Energy harvesting by using its various modes of operation has been demonstrated for body motion [60] vibrations produced by human walking [61], pressing of hand [62-63], insole of shoes [64-65], sound waves present in air [66] and in water [67]. In its sliding mode of operation, approximately a conversion efficiency of 50% has been observed [68] whereas it is about 24% in the case of rotation based TENG [69]. It has been demonstrated that the output power reaches to a maximum value of 1200 W/m square which is quite sufficient for powering the small device applications in wearable electronics. Energy harvesting has also been demonstrated from flowing river water [70], rain drops [71] by using contact-electrification between solid surface and liquid as applicable in parallel TENG [72]. The energy can be harvested using the fluctuations in the water surface [73], water wave, and water stream [74]. Energy harvesting can be easily done without constructing huge dams. It has been predicted that in the near future a 1MW of power can be generated from 1km square of surface in ocean if the output of each unit will be 1mw on an average by constructing a 3-D network of TENG [75-76]. This will be a big source of blue energy for fulfilling large scale applications/requirements of the world's energy needs.

### 5.2. TENG as self –powered sensor

Triboelectric nanogenerators can also be used as self-powered sensors without applying any external power source just by sensing dynamic mechanical action. A large number of sensing applications are available which includes finger touching [77-79], detection of vibration [80], rotation and chemical sensor [81-82].

## 6. CONCLUSION

In this review paper, a study of triboelectric nanogenerator (TENG) has been made on the basis of its fundamental modes of operation, harvesting energy from various sources, along with various factors affecting its efficiency and applications in the real world. Its simple mechanism of working, compact size, light weight and innovative design makes this device applicable in small and large power generating fields. The output of the TENG depends upon various factors like effective area of contact, amount of force/pressure applied, and morphology of the surface in contact, temperature and humidity. Triboelectric nanogenerators

are capable of working over a wide range of temperatures and variable humidity conditions. All the energy which otherwise goes waste in the environment can be utilized by such devices. For achieving sustainable and self-powered systems, TENG devices will soon be available in the form of various products in the wearable electronics, mobile and healthcare monitory systems along with many other relevant applications.

**Acknowledgement:** *The author Deepak Anand and Ashish Sambyal organized the concept of this review paper and would like to thank Prof. Rakesh Vaid for supervising the project. All the authors read and approved the final manuscript.*

#### REFERENCES

- [1] S. P. Beeby, M. J. Tudor, and N. M. White, "Energy harvesting vibration sources for microsystems applications", *Meas. Sci. Technol.*, vol. 17, no. 12, pp. R175–R195, October 2006.
- [2] J. W. Matiko, N. J. Grabham, S. P. Beeby, and M. J. Tudor, "Review of the application of energy harvesting in buildings", *Meas. Sci. Technol.*, vol. 25, no. 1, Article ID 012002, November 2013.
- [3] E. Arroyo and A. Badel, "Electromagnetic vibration energy harvesting device optimization by synchronous energy extraction", *Sens. Actuators, A*, vol. 171, no. 2, pp. 266–273, November 2011.
- [4] J. Chen, D. Chen, T. Yuan, and X. Chen, "A multi-frequency sandwich type electromagnetic vibration energy harvester", *Appl. Phys. Lett.*, vol. 100, no. 21, Article ID 213509, 2012.
- [5] J. Yang, Y. Wen, P. Li, X. Bai, and M. Li, "Improved piezoelectric multifrequency energy harvesting by magnetic coupling", In Proceedings of the 10th IEEE SENSORS Conference 2011 (SENSORS'11), Limerick, Ireland, 2011, pp. 28–31.
- [6] J. Yang, Y. Wen, P. Li, X. Yue, and Q. Yu, "Energy harvesting from ambient vibrations with arbitrary in-plane motion directions using a magnetostrictive/piezoelectric laminate composite transducer", *J. Electron. Mater.*, vol. 43, no. 7, pp. 2559–2565, May 2014.
- [7] Q. Yu, J. Yang, X. Yue, A. Yang, J. Zhao, N. Zhao, Y. Wen and P. Li, "3D, wideband vibro-impacting-based piezoelectric energy harvester", *AIP Adv.*, vol. 5, no. 4, Article ID 047144, April 2015.
- [8] P. D. Mitcheson, P. Miao, B. H. Stark, E. M. Yeatman, A. S. Holmes, and T. C. Green, "MEMS electrostatic micropower generator for low frequency operation", *Sens. Actuators, A*, vol. 115, no. 2-3, pp. 523–529, September 2004.
- [9] L. G. W. Tvedt, D. S. Nguyen, and E. Halvorsen, "Nonlinear behavior of an electrostatic energy harvester under wide-and narrowband excitation", *J. Microelectromech. Syst.*, vol. 19, no. 2, pp. 305–316, May 2010.
- [10] J. Yang, Y. Wen, P. Li, X. Yue, Q. Yu, and X. Bai, "A two-dimensional broadband vibration energy harvester using magnetoelectric transducer", *Appl. Phys. Lett.*, vol. 103, no. 24, Article ID 243903, December 2013.
- [11] J. Yang, Q. Yu, J. Zhao, N. Zhao, Y. Wen, P. Li and J. Qiu, "Design and optimization of a bi-axial vibration-driven electromagnetic generator", *J. Appl. Phys.*, vol. 116, no. 11, Article ID 114506, September 2014.
- [12] K. Y. Lee, J. Chun, J.-H. Lee, K. N. Kim, N.-R. Kang, J.-Y. Kim, M. H. Kim, K.-S. Shin, M. K. Gupta, J. M. Baik, S.-W. Kim, "Hydrophobic sponge structure-based triboelectric nanogenerator", *Adv. Mater.*, vol. 26, no. 29, pp. 5037–5042, May 2014.
- [13] G. Zhu, C. Pan, W. Guo, C.-Y. Chen, Y. Zhuo, R. Yu and Z. L. Wang, "Triboelectric-generator-driven pulse electrodeposition for micropatterning", *Nano Lett.*, vol. 12, no. 9, pp. 4960–4965, August 2012.
- [14] G. Zhu, Z.-H. Lin, Q. Jing, P. Bai, C. Pan, Y. Yang, Y. Zhou and Z. L. Wang, "Toward large-scale energy harvesting by a nanoparticle-enhanced triboelectric nanogenerator", *Nano Lett.*, vol. 13, no. 2, pp. 847–853, January 2013.
- [15] J. Yang, J. Chen, Y. Yang, H. Zhang, W. Yang, P. Bai, Y. Su and Z. L. Wang, "Broadband vibrational energy harvesting based on a triboelectric nanogenerator", *Adv. Energy Mater.*, vol. 4, no. 6, Article ID 1301322, November 2013.
- [16] S. Kim, M. K. Gupta, K. Y. Lee, A. Sohn, T. Y. Kim, K.-S. Shin, D. Kim, S. K. Kim, K. H. Lee, H.-J. Shin, D.-W. Kim and S.-W. Kim, "Transparent flexible graphene triboelectric nanogenerators", *Adv. Mater.*, vol. 26, no. 23, pp. 3918–3925, 2014.

- [17] W. Yang, J. Chen, G. Zhu, X. Wen, P. Bai, Y. Su, Y. Lin and Z. Wang, "Harvesting vibration energy by a triple-cantilever based triboelectric nanogenerator", *Nano Res.*, vol. 6, no. 12, pp. 880–886, September 2013.
- [18] H. Zhang, Y. Yang, Y. Su, J. Chen, K. Adams, S. Lee, C. Hu and Z. L. Wang, "Triboelectric nanogenerator for harvesting vibration energy in full space and as self-powered acceleration sensor", *Adv. Funct. Mater.*, vol. 24, no. 10, pp. 1401–1407, October 2014.
- [19] B. K. Yun, J. W. Kim, H. S. Kim et al., "Base-treated polydimethylsiloxane surfaces as enhanced triboelectric nanogenerators", *Nano Energy*, vol. 15, pp. 523–529, July 2015.
- [20] Y. Su, J. Chen, Z. Wu, and Y. Jiang, "Low temperature dependence of triboelectric effect for energy harvesting and self-powered active sensing", *Appl. Phys. Lett.*, vol. 106, no. 1, Article ID 013114, January 2015.
- [21] Y. Yang, H. Zhang, Z.-H. Lin et al., "Human skin based triboelectric nanogenerators for harvesting biomechanical energy and as self-powered active tactile sensor system", *ACS Nano*, vol. 7, no. 10, pp. 9213–9222, September 2013.
- [22] W. Seung, M. K. Gupta, K. Y. Lee et al., "Nanopatterned textile-based wearable triboelectric nanogenerator", *ACS Nano*, vol. 9, no. 4, pp. 3501–3509, February 2015.
- [23] P. Bai, G. Zhu, Y. Liu et al., "Cylindrical rotating triboelectric nanogenerator", *ACS Nano*, vol. 7, no. 7, pp. 6361–6366, June 2013.
- [24] G. Zhu, J. Chen, T. Zhang, Q. Jing, and Z. L. Wang, "Radial- arrayed rotary electrification for high performance triboelectric generator", *Nat. Commun.*, vol. 5, article 3426, March 2014.
- [25] Y. Yang, G. Zhu, H. Zhang et al., "Triboelectric nanogenerator for harvesting wind energy and as self-powered wind vector sensor system", *ACS Nano*, vol. 7, no. 10, pp. 9461–9468, September 2013.
- [26] Z. Wen, J. Chen, M.-H. Yeh et al., "Blow-driven triboelectric nanogenerator as an active alcohol breath analyzer", *Nano Energy*, vol. 16, pp. 38–46, September 2015.
- [27] Z.-H. Lin, G. Cheng, W. Wu, K. C. Pradel, and Z. L. Wang, "Dual-mode triboelectric nanogenerator for harvesting water energy and as a self-powered ethanol nanosensor", *ACS Nano*, vol. 8, no. 6, pp. 6440–6448, May 2014.
- [28] S. Jung, J. Lee, T. Hyeon, M. Lee, and D.-H. Kim, "Fabric- based integrated energy devices for wearable activity monitors", *Adv. Mater.*, vol. 26, no. 36, pp. 6329–6334, July 2014.
- [29] H. Zhang, Y. Yang, Y. Su et al., "Triboelectric nanogenerator as self-powered active sensors for detecting liquid/gaseous water/ ethanol", *Nano Energy*, vol. 2, no. 5, pp. 693–701, September 2013.
- [30] Y. Su, G. Zhu, W. Yang et al., "Triboelectric sensor for self-powered tracking of object motion inside tubing", *ACS Nano*, vol. 8, no. 4, pp. 3843–3850, March 2014.
- [31] F. Yi, L. Lin, S. Niu et al., "Stretchable-rubber-based triboelectric nanogenerator and its application as self-powered body motion sensors", *Adv. Funct. Mater.*, vol. 25, no. 24, pp. 3688–3696, June 2015.
- [32] F. Yi, L. Lin, S. Niu et al., "Stretchable-rubber-based triboelectric nanogenerator and its application as self-powered body motion sensors", *Adv. Funct. Mater.*, vol. 25, no. 24, pp. 3688–3696, June 2015.
- [33] Y. Wu, Q. Jing, J. Chen et al., "A self-powered angle measurement sensor based on triboelectric nanogenerator", *Adv. Funct. Mater.*, vol. 25, no. 14, pp. 2166–2174, April 2015.
- [34] P. Bai, G. Zhu, Q. Jing et al., "Transparent and flexible barcode based on sliding electrification for self-powered identification systems", *Nano Energy*, vol. 12, pp. 278–286, March 2015.
- [35] Z. L. Wang, J. Chen, and L. Lin, "Progress in triboelectric nanogenerators as a new energy technology and self-powered sensors", *Energy Environ. Sci.*, vol. 8, no. 8, pp. 2250–2282, August 2015.
- [36] G. Zhu, B. Peng, J. Chen, Q. Jing, and Z. L. Wang, "Triboelectric nanogenerators as a new energy technology: From fundamentals, devices, to applications", *Nano Energy*, vol. 14, pp. 126–138, May 2015.
- [37] S. Park, H. Kim, M. Vosgueritchian et al., "Stretchable energy- harvesting tactile electronic skin capable of differentiating multiple mechanical stimuli modes", *Adv. Mater.*, vol. 26, no. 43, pp. 7324–7332, November 2014.
- [38] F.-R. Fan, L. Lin, G. Zhu, W. Wu, R. Zhang, and Z. L. Wang, "Transparent triboelectric nanogenerators and self-powered pressure sensors based on micropatterned plastic films", *Nano Lett.*, vol. 12, no. 6, pp. 3109–3114, May 2012.
- [39] J. Yang, J. Chen, Y. Su et al., "Eardrum-inspired active sensors for self-powered cardiovascular system characterization and throat-attached anti-interference voice recognition", *Adv. Mater.*, vol. 27, no. 8, pp. 1316–1326, February 2015.
- [40] S. Lee, W. Ko, Y. Oh et al., "Triboelectric energy harvester based on wearable textile platforms employing various surface morphologies", *Nano Energy*, vol. 12, pp. 410–418, March 2015.
- [41] G. Zhu, J. Chen, Y. Liu et al., "Linear-grating triboelectric generator based on sliding electrification", *Nano Lett.*, vol. 13, no. 5, pp. 2282–2289, April 2013.

- [42] S. Wang, L. Lin, Y. Xie, Q. Jing, S. Niu, and Z. L. Wang, "Sliding-triboelectric nanogenerators based on in-plane charge- separation mechanism", *Nano Lett.*, vol. 13, no. 5, pp. 2226– 2233, April 2013.
- [43] S. Niu, Y. Liu, S. Wang et al., "Theoretical investigation and structural optimization of single-electrode triboelectric nano- generators", *Adv. Funct. Mater.*, vol. 24, no. 22, pp. 3332–3340, June 2014.
- [44] Y. Li, G. Cheng, Z.-H. Lin, J. Yang, L. Lin, and Z. L. Wang, "Single-electrode-based rotary triboelectric nanogenerator and its applications as self-powered contact area and eccentric angle sensors", *Nano Energy*, vol. 11, pp. 323–332, January 2015.
- [45] B. Meng, W. Tang, Z.-H. Too et al., "A transparent single-friction-surface triboelectric generator and self-powered touch sensor", *Energy Environ. Sci.*, vol. 6, no. 11, pp. 3235–3240, August 2013.
- [46] C. R. S. Rodrigues, C. A. S. Alves, J. Puga, A. M. Pereira and J. O. Ventura, "Triboelectric driven turbine to generate electricity from the motion of water", *Nano energy*, vol. 30, pp. 379-386, December 2016.
- [47] T. Jiang, Y. Yao, L. Xu, L. Zhang, T. Xiao and Z. L. Wang, "Spring Assisted Triboelectric Nanogenerator for efficiently Harvesting Water Wave Energy", *Nano Energy*, vol. 31, pp. 560-567, January 2016.
- [48] T. Kim, J. Chung, D. Y. Kim, J. H. Moon, S. Lee, M. Cho, S. H. Lee and S. Lee, "Design optimization of rotating triboelectric nanogenerator by water electrification and inertia", *Nano Energy*, vol. 27, pp. 340-351, September 2016.
- [49] Z. Tian, J. He, X. Chen, Z. Zhang, T. Wen, C. Zhai, J. Han, J. Mu, X. Hou, X. Chou and C.Y. Xue, "Performance-Boosted Triboelectric Textile for Harvesting Human Motion Energy", *Nano Energy*, vol. 39, pp. 562-570, September 2017.
- [50] A. Y. Choi, C. J. Lee, J. Park, D. Kim and Y. T. Kim, "Corrugated Textile based Triboelectric Generator for Wearable Energy Harvesting", *Sci. Rep.*, vol. 7, Article ID 45583, March 2017.
- [51] Te-Chien Hou, Y. Yang, H. Zhang, J. Chen, L.J. Chen and Z.L. Wang, "Triboelectric nanogenerator built inside shoe insole for harvesting walking energy", *Nano Energy*, vol. 2, no. 5, pp. 856–862, September 2013.
- [52] M. Taghavi and L. Beccai, "A contact-key triboelectric nanogenerator: Theoretical and experimental study on motion speed influence", *Nano Energy*, vol 18, pp. 283-292, November 2015.
- [53] D. Yoo, D. Choi, and D. S. Kim, "Comb-shaped electrode-based TENG's for bidirectional mechanical energy harvesting", *Microelectron. Eng.*, vol. 174, pp. 46-51, April 2017,
- [54] S. Lee, Y. Lee, D. Kim, Y. Yang, L. Lin, Z. H. Lin, W. Hwang and Z. L. Wang, "Triboelectric Nanogenerator for harvesting pendulum oscillation energy", *Nano Energy*, vol. 2, no. 6, pp. 1113-1120, November 2013.
- [55] V. Nguyen and Rusen Yang, "Effect of humidity and pressure on triboelectric nanogenerator", *Nano Energy*, vol. 2, no. 5, pp. 604-608, September 2013.
- [56] J. Shen, Z. Li, J. Yu, and B. Ding, "Humidity-Resisting Triboelectric Nanogenerator for High Performance Biomechanical Energy Harvesting", *Nano Energy*, vol. 40, pp. 282-288, October 2017.
- [57] X. Wen, Y. Su, Y. Yang, H. Zhang and Z. L. Wang, "Applicability of triboelectric nanogenerator over a wide range of temperature", *Nano Energy*, vol. 4, pp. 150-156, March 2014.
- [58] M. A. P. Mahmud, J. Lee, G. Kim, H. Lim and K. B. Choi, "Improving the surface charge density of a contact-separation-based triboelectric nanogenerator by modifying the surface morphology", *Microelectron. Eng.*, vol. 159, pp. 102-107, June 2016.
- [59] M. L. Seol, S.H Lee, J.W. Han, D. Kim, G.H Cho and Y.K Choi, "Impact of contact pressure on output voltage of triboelectric nanogenerator based on deformation of interfacial structures" *Nano Energy*, vol. 17, pp. 63-71, October 2015.
- [60] W. Q. Yang, J. Chen, X. N. Wen, Q. S. Jing, J. Yang, Y. J. Su, G. Zhu, W. Z. Wu and Z. L. Wang, "Triboelectrification Based Motion Sensor for Human-Machine Interfacing", *ACS Appl. Mater. Interfaces*, vol. 6, pp. 7479-7484, April 2014.
- [61] W. Q. Yang, J. Chen, G. Zhu, J. Yang, P. Bai, Y. J. Su, Q. S. Jing, X. Cao and Z. L. Wang, "Harvesting Energy from the Natural Vibration of Human Walking", *ACS Nano*, vol. 7, pp. 11317-11324, November 2013.
- [62] X. S. Zhang, M. D. Han, R. X. Wang, F. Y. Zhu, Z. H. Li, W. Wang and H. X. Zhang, "Frequency-multiplication high-output triboelectric nanogenerator for sustainably powering biomedical microsystems", *Nano Lett.*, vol. 13, no. 3, pp.1168-1172, February 2013.
- [63] S. Kim, M. K. Gupta, K. Y. Lee, A. Sohn, T. Y. Kim, K. S. Shin, D. Kim, S. K. Kim, K. H. Lee, H. J. Shin, D. W. Kim and S. W. Kim, "Transparent flexible graphene triboelectric nanogenerators", *Adv. Mater.*, vol. 26, no. 23, pp. 3918-3925, March 2014.
- [64] G. Zhu, P. Bai, J. Chen and Z. L. Wang, "Power-generating shoe insole based on triboelectric nanogenerators for self-powered consumer electronics", *Nano Energy*, vol. 2, no. 5, pp. 688-692, September 2013.

- [65] B. Meng, W. Tang, X. S. Zhang, M. D. Han, W. Liu and H. X. Zhang, "Self-powered flexible printed circuit board with integrated triboelectric generator", *Nano Energy*, vol. 2, no. 6, pp. 1101-1106, November 2013.
- [66] J. Yang, J. Chen, Y. Liu, W. Q. Yang, Y. J. Su and Z. L. Wang, "Triboelectrification-Based Organic Film Nanogenerator for Acoustic Energy Harvesting and Self-Powered Active Acoustic Sensing", *ACS Nano*, vol. 8, no. 3, pp. 2649-2657, February 2014.
- [67] A. F. Yu, M. Song, Y. Zhang, Y. Zhang, L. B. Chen, J. Y. Zhai and Z. L. Wang, "Self-powered acoustic source locator in underwater environment based on organic film triboelectric nanogenerator", *Nano Res.*, vol. 8, pp. 765-773, September 2014.
- [68] G. Zhu, Y. S. Zhou, P. Bai, X. S. Meng, Q. S. Jing, J. Chen and Z. L. Wang, "A shape-adaptive thin-film-based approach for 50% high-efficiency energy generation through micro-grating sliding electrification", *Adv. Mater.*, vol. 26, no. 23, pp. 3788-3796, April 2014.
- [69] G. Zhu, J. Chen, T. J. Zhang, Q. S. Jing and Z. L. Wang, "Radial-arrayed rotary electrification for high performance triboelectric generator", *Nat. Commun.*, vol. 5, article 3426, March 2014.
- [70] Z. H. Lin, G. Cheng, S. Lee, K.C. Pradel and Z. L. Wang, "Harvesting Water Drop Energy by a Sequential Contact-Electrification and Electrostatic-Induction Process", *Adv. Mater.*, vol. 26, pp. 4690-4696, July 2014.
- [71] Z. H. Lin, G. Cheng, W. Z. Wu, K. C. Pradel and Z. L. Wang, "Dual-Mode Triboelectric Nanogenerator for Harvesting Water Energy and as a Self-Powered Ethanol Nanosensor", *ACS Nano*, vol. 8, no. 6 pp. 6440-6448, May 2014.
- [72] Z. H. Lin, G. Cheng, L. Lin, S. Lee and Z. L. Wang, "Water-Solid Surface Contact Electrification and its Use for Harvesting Liquid-Wave Energy", *Angew. Chem., Int. Ed.*, vol. 52, no. 48, pp. 12545-12549, November 2013.
- [73] G. Zhu, Y. J. Su, P. Bai, J. Chen, Q. S. Jing, W. Q. Yang and Z. L. Wang, "Harvesting Water Wave Energy by Asymmetric Screening of Electrostatic Charges on a Nanostructured Hydrophobic Thin-Film Surface", *ACS Nano*, vol. 8, no. 6, pp. 6031-6037, April 2014.
- [74] X. N. Wen, W. Q. Yang, Q. S. Jing and Z. L. Wang, "Harvesting broadband kinetic impact energy from mechanical triggering/vibration and water waves", *ACS Nano*, vol. 8, no. 7, pp. 7405-7412, June 2014.
- [75] Y. F. Hu, J. Yang, Q. S. Jing, S. M. Niu, W. Z. Wu and Z. L. Wang, "Triboelectric Nanogenerator Built on Suspended 3D Spiral Structure as Vibration and Positioning Sensor and Wave Energy Harvester", *ACS Nano*, vol. 7, no. 11, pp. 10424-10432, October 2013.
- [76] Y. Yang, H. L. Zhang, R. Y. Liu, X. N. Wen, T. C. Hou and Z. L. Wang, "Fully Enclosed Triboelectric Nanogenerators for Applications in Water and Harsh Environments", *Adv. Energy Mater.*, vol. 3, no. 12, pp. 1563-1568, December 2013.
- [77] Y. Yang, H. L. Zhang, X. D. Zhong, F. Yi, R. M. Yu, Y. Zhang and Z. L. Wang, "Electret Film-Enhanced Triboelectric Nanogenerator Matrix for Self-Powered Instantaneous Tactile Imaging", *ACS Appl. Mater. Interfaces*, vol. 6, no. 5, pp. 3680-3688, February 2014.
- [78] Y. Yang, H. L. Zhang, Z. H. Lin, Y. S. Zhou, Q. S. Jing, Y. J. Su, J. Yang, J. Chen, C. G. Hu and Z. L. Wang, "Human Skin Based Triboelectric Nanogenerators for Harvesting Biomechanical Energy and as Self-Powered Active Tactile Sensor System", *ACS Nano*, vol. 7, no. 10, pp. 9213-9222, September 2013.
- [79] B. Meng, W. Tang, Z. H. Too, X. S. Zhang, M. D. Han, W. Liu and H. X. Zhang, "A transparent single-friction-surface triboelectric generator and self-powered touch sensor", *Energy Environ. Sci.*, vol. 6, no. 11 pp. 3235-3240, August 2013.
- [80] J. Yang, Y. Yang, J. Chen, H. L. Zhang, W. Q. Yang, P. Bai, Y. J. Su and Z. L. Wang, "Broadband Vibrational Energy Harvesting Based on a Triboelectric Nanogenerator", *Adv. Energy Mater.*, vol. 4, no. 6, article ID 1301322, April 2014.
- [81] Q. S. Jing, G. Zhu, W. Z. Wu, P. Bai, Y. N. Xie, R. P. S. Han and Z. L. Wang, "Self-powered triboelectric velocity sensor for dual-mode sensing of rectified linear and rotary motions", *Nano Energy*, vol. 10, pp. 305-312, November 2014.
- [82] Z. H. Lin, G. Zhu, Y. S. Zhou, Y. Yang, P. Bai, J. Chen and Z. L. Wang, "A Self-Powered Triboelectric Nanosensor for Mercury Ion Detection", *Angew. Chem., Int. Ed.*, vol. 52, no. 19, pp. 5065- 5069, May 2013.